


TM

cera
cote

Soldering Station / KUNOICHI

High-output and compact Temperature Speed / Heat Controlled Soldering Iron for providing the most suitable heat supply.



The simple design for pursuing efficiency, certainty, and assuring the quality.

It is the compact model adopted with Assembly Tip excellent in the heat recovery for maintaining a stable working temperature.


6 Features of KUNOICHI

- 1 • Capable of flexibly handling even the most delicate and fine works, thanks to the working portion close to at hand.
- 2 • Provides high-power even with the smallest soldering tip size.
- 3 • Delivers an amazing start-up, reaching 350°C in only 8 seconds, thanks to all-in-one design of integrating the soldering tip, heater & sensor.
- 4 • Simple design with the number of parts reduced by employing Assembly Tip.
- 5 • Particularly powerful when using a soldering tip with a shape having relatively poor thermal conduction.
- 6 • Pencil-type design to fit also for a woman's hand for supporting the high workability.


* More standard soldering tips will be added.



Structural Drawing

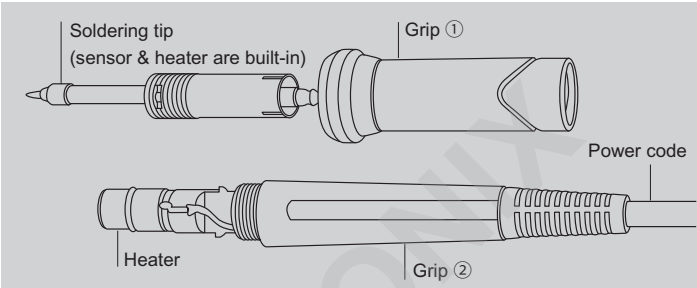

Temperature Characteristics

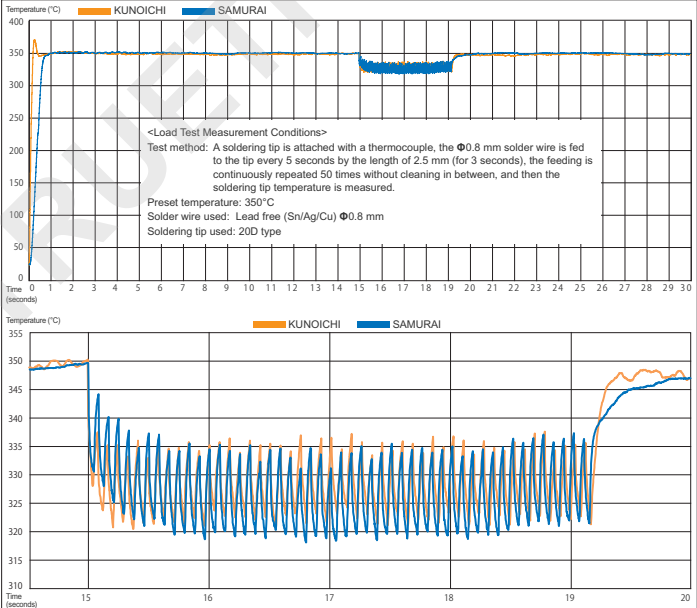

■ Specification of KUNOICHI Station

Part number	KUS -1- (TIP no.)
Power source	AC100V 50/60Hz
Power consumption	70W
Control temperature	150~450°C, PID control system
Temperature sensor	K-thermocouple system
Soldering iron holder	Cleaning sponge included

■ Power unit

Part number	KUB-13
Output	DC24V (Pulse)
External dimension	120(W) x 96(H) x 141(D)mm
Weight (with no code)	1.9kg

■ Soldering iron


Part number	KUH -1- (TIP no.)
Power consumption	70W (DC24V)
Ground resistance of the soldering iron tip	< 2Ω
Leak voltage	< 2mV
Code	1.2m
Total length (with no code)	172mm
Weight (with no code)	27g

■ Replacement parts


Part name	Part number
Power unit	KUB-13
Soldering iron (with no TIP)	KUH-1
Soldering iron holder set (sponge included)	KUD-SS
Sponges, 5 pcs set	CC-S5
Fuses, 5 pcs (100V/200V)	BB-FU1005/BB-FU2005

KUNOICHI KU series


KU40B (Solder 4 mm)

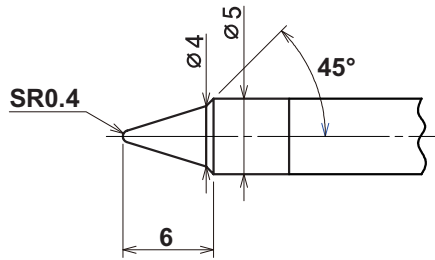


KU20B (Solder 3 mm)




KU20BL (Solder 4 mm)

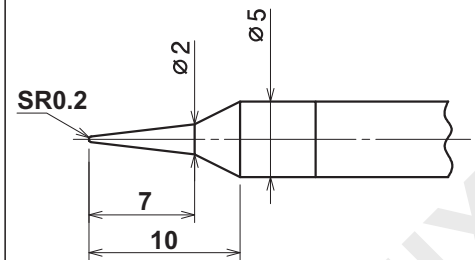

KU22BL (Solder 3 mm)

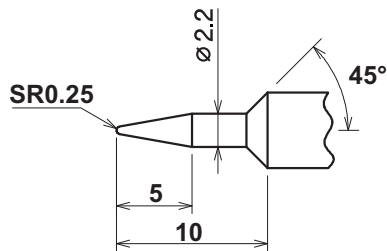


KU08CU (Solder 3 mm)

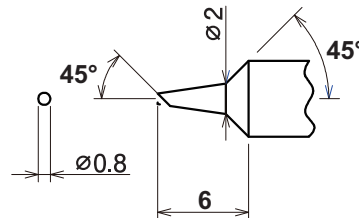


KU12CU (Solder 3 mm)


KU12C (Solder only tip)

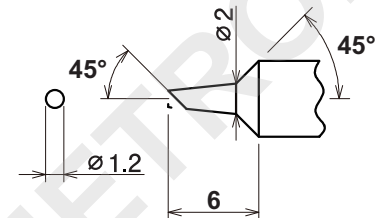


KU12CUL (Solder 3 mm)
KU12CL (Solder only tip)

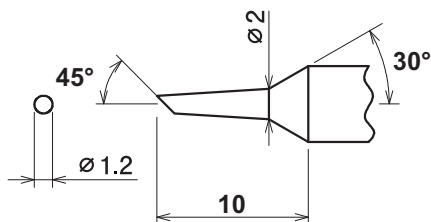


KU15CU (Solder 3 mm)
KU15C (Solder only tip)

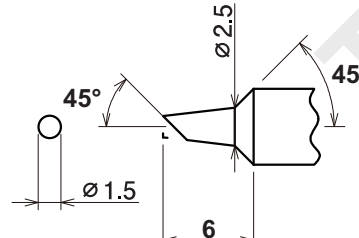


KU20CU (Solder 3 mm)
KU20C (Solder only tip)

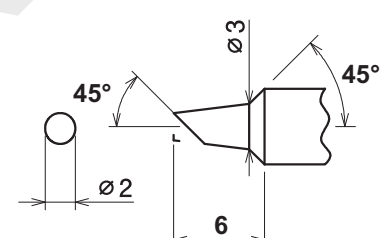


KU30CU (Solder 4 mm)
KU30C (Solder only tip)

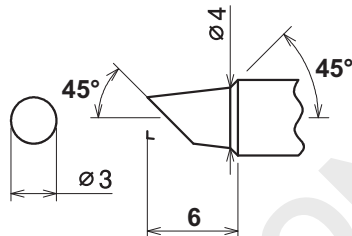


KU12D (Solder 3 mm)

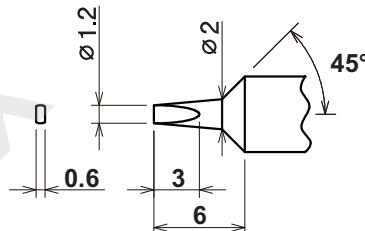


KU12DL (Solder 3 mm)

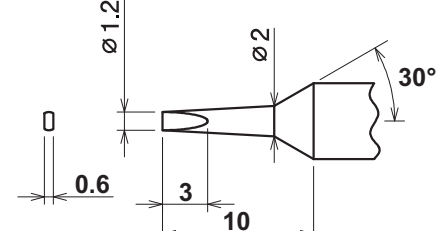


KU20D (Solder 4 mm)

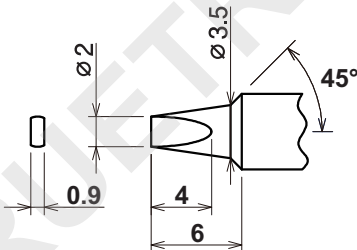


KU30D (Solder 3 mm)

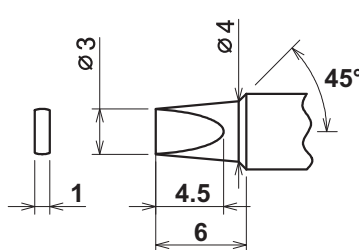


KU30KDL (Solder 5 mm)

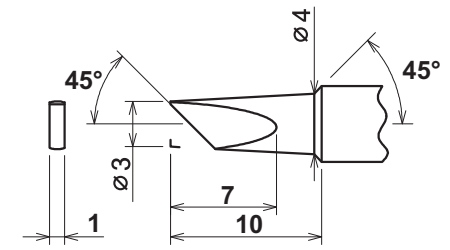


KU15KE
(Solder-diagonal
1.2 mm)

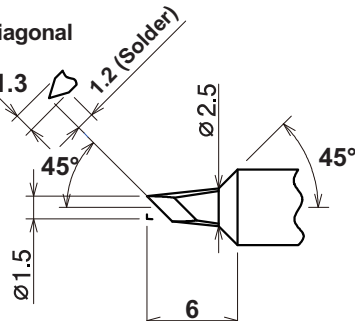

KU30KEL
(Solder-diagonal 2 mm)

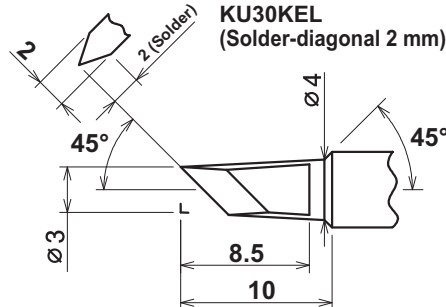

KU15DCV
(Two-sided 1.5 mm
and inside the
groove)

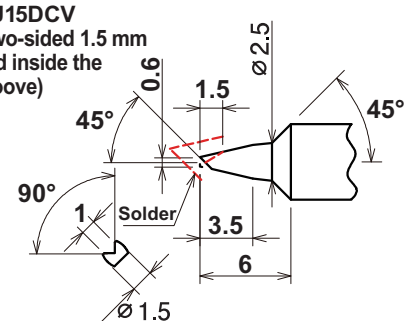

**KUNOICHI provides an amazing start-up speed.
It is a temperature controlled soldering iron, the most suitable for
fine soldering and for soldering correction operations.**

The soldering iron series "KUNOICHI" with the temperature control system that has become a commercial reality by the comprehensive technology of Ceracote Technology Corporation that has been leading the soldering iron industry.

The KUNOICHI is your powerful partner in a wide variety of countermeasures for your challenges.



TM



CeraCote

Ceracote Technology (HK) Co. Ltd.

Office 14, 22F Wealth Commercial Centre, 48 Kwong Wa Street,
Mong Kok, Kowloon Hong Kong
Tel: +852 27717787 Mail: ceracote.hongkong@gmail.com
URL : <http://www.ceracotechina.com>

Ceracote Technology Corporation.

5-5 Egasaki-cho, Tsurumi-ku, Yokohama, Kanagawa, Japan
Tel: +81 455753639 Mail: info@ceracote.co.jp
URL : <http://www.ceracote.co.jp>

Distributed by:

Truetronix Technology Co.,Ltd.

36 Soi. Ladplakao 72, Ladplakao Rd., Anusaowaree, Bangkhen, Bangkok. 10220

Tel. 02-9716761 Cell Phone:085-1214926 Fax. 02-9716762

www.truetronix.com email: sales@truetronix.com